

ಬೃಹತ್ ಬೆಂಗಳೂರು ಮಹಾನಗರ ಪಾಲಿಕೆ

ಯಲಹಂಕ ವಲಯ

ತಾಂತ್ರಿಕ ವಿಭಾಗ: ಬ್ಯಾಟರಾಯನಪುರ

ತಾಂತ್ರಿಕ ಉಪವಿಭಾಗ: ಬ್ಯಾಟರಾಯನಪುರ

Name of work: Detailed Estimate for the Work of Drilling of Borewells and Providing Pump and Motor at Thanisandra in Ward No. 06, Byatarayanapura Sub Division.

Estimate Cost	8.00 Lakhs
Work Code	006-13-000083

BRUHAT BANGALORE MAHANAGARA PALIKE

YELAHANKA ZONE

Estimate Cost Rs. **800000.00**

Name of Work: Detailed Estimate for the Work of Drilling of Borewells and Providing Pump and Motor at Thanisandra in Ward No. 06, Byatarayanapura Sub Division.

Sl No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
1	Geophysical investigation of site for sinking Borewell for supplying drinking water to the habitation either through the Hand pump, MWS of P.W.S.S by vertical electrical sounding by adopting Venner or Schlumberger's method, including reconnaissance survey of geological formation, Gerophysical investigation of existing Ground Wate in the vicinity, its qualityf 1.0 meter in consolidated formation for proper seating of casing pipe, depth of drilling required to cover full depth of aquifer proposed to be tapped, probable yield and other information required including transportation of instrument and accessories to work site., engaging techinical personal and labour required etc., as per Specification and direction **(P.42, I. 9.4) PRED.SR 2011-12**	Each BW							
	Thanisandra SC Colony		1				**1**	1900.00	**1900.00**
2	Sinking borewell of 165 mm dia clear using super fast hydraulic rig of capacity 250 PSIG & above CFM & above in all strats including over burden upto 20 mts fixing of casing pipes, collars and cap with necessary cutting, throading and welding including transportation of rig and supporing vehicles, crew charges and cost of consumables etc., complete including yield testing at the final depth with a minimum working of compressor for one hour (excluding coat of casing pipes, collars, cap etc.,) **P. 36 / I. 9.1 PRED SR 2010-11**	Rmtr							
	0 to 50 m		1	50.00			**50.00**	287.00	**14350.00**
	50 to 100 m		1	50.00			**50.00**	379.00	**18950.00**
	100 to 150 m		1	50.00			**50.00**	422.00	**21100.00**
	150 to 200 m		1	50.00			**50.00**	464.00	**23200.00**
	200 to 250 m		1	50.00			**50.00**	513.00	**25650.00**
	250 to 300 m		1	50.00			**50.00**	550.00	**27500.00**
3	Supply of ISI mark 175 mm nominal bore medium black ERW casing pipe of 5 mm thick black electric resistance continuous welded mild steel tube material confirming to IS 1387 / 1993 & manufactured from hot rolled steel skelp / stripes in random length of 4 to 7 mts both ends threaded confirming to IS 554 / 1985, one end fixed with a socket and the other and with a plastic protection end (including of all taxes) **SE PRED Approved Rate**	Rmtr							
			1	70.00			**70.00**	1305.00	**91350.00**
4	Providing 250mm dia PVC Pipe 6kg/cm **SE PRED Approved Rate**	Rmtr							
			1	18.00			**18.00**	754.47	**13580.00**
5	Providing 175mm dia M.S Collar **SE PRED Approved Rate**	Each							
			9				**9**	150.00	**1350.00**
6	Providing and fixing 160mm Borewell Cap with Clamp Set H/D	Each	1				**1**	695.00	**695.00**

Sl No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
7	Supply and delivery at site brand New texmo/ innoval/ Lubi/ Sabar / Atalanta/ Calamal/ make suitable for vertical installation in 150mm dia bore well comprising of single stage or multistage CF pump close coupled by measns of stainless steel coupling to suitable HP suitable speed totally enclosed and filled with pure drinking water (Wet type) squirrel cage submersible induction motor suitable for opertation of 3PH., 50 Hz, 380/440 volts AC supply fitted with required aqccessories such as suction, casing suction strainers sand guard Non return value etc. complete . The pump and motor shall form an integral unit with all the required fittings 17.50 HP 30 stage. **SE RDED Approved Rate**	No							
	17.50 HP 30 Stage		1				**1**	62550.00	**62550.00**
8	Supplying of ISI marked galvanized mild steel tube (continously welded electric resistance welded (ERW) high frequency, induction welded (HFIW) Hot finished welded type of nominal bore given below screwed at both ends as per IS 554/1986 with latest amendments, pipes threaftes at one end and the other end protected asper specification in random lengths of 4 to 7 mtrs Confirming to IS 1239 part I/1990 with amendament 1-5 and with all its latest amendements if any. The pipes supplied should be with BIS mark No 3/08-09 2406/15.10.2008.	Rmtr							
			1	300.00			**300.00**	415.00	**124500.00**
8A	Heavy Duty Collars		1	45.00			**45.00**	130.00	**5850.00**
9	Supplying and drawing 3 core flat PVC sheathed submersible pump cable manufactured with electrolytic grade copper with flexible copper conductor confirming to table 3 class 5 of IS:8130-1984 and virgin grade PVC insulation and sheathed suitable for working voltage upto 1100 Volts. P. No. 49/ I No. 29-c(1) **4 Sqm mm of 36 strands 0.3mm dia Group - A KPWD Electrical SR 2010-11**	Mtr							
			1	800.00			**800.00**	185.00	**148000.00**
10	Erection of pumpset including aligning and balancing with all necessary erection materials and labour including supply and erection of one pair supporting clamps, one borewell cap. Cable clips with bolts, nuts, valves guages etc., involoved in the job (Necessary GI pipe and specials with be supplied by the board at the site free of cost) **(As per rate approved KUWS & DB for year 2008-09**	No							
			1				**1**	3000.00	**3000.00**
11	Supplying and fixing 20"x20"x2.5" polished wood board made of not less than 15mm thick plank on both sides with planks made out of not more than 2 pieces and fixing the same to the wall using tapered inverted wooden plugs screws etc., **P No. 32/ I No. 2/f KPWD Electrical SR 2010-11**	Each							
			1				**1**	285.00	**285.00**

Sl No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
12	Supplying of LTUG cable having aluminium condutor PVC insulated shethed, galvnised steel, wire / steel tap armoured cable with PVC outer sheathing 1.1 KV class.**P No. 68/ I No. 4(d) 4 core 16 Sqmm KPWD Electrical SR 2010-11**	Mtr							
	For New Drilled Borewell		1	50.00			**50.00**	150.00	**7500.00**
	For Existing Borewell Repair		1	400.00			**400.00**	150.00	**60000.00**
13	Labour charges for laying of 1.1 K.V class UG cable (PWD Electrical SR-1999-2000, **P No. 69 / I No. Ia In existing trencg/duct 6Sqmm to 16 Sqmm) KPWD Electrical SR 2010-11**	Mtr							
	For New Drilled Borewell		1	50.00			**50.00**	8.00	**400.00**
	For Existing Borewell Repair		1	400.00			**400.00**	8.00	**3200.00**
14	Digging or trenching of 0.6m deep x 0.5 mtr wide refilling the trench to the required ground level and consolidating etc., complete (as per Civil SR KSRB **1-2 P-7) P No. 70/ I. No. 6-c KPWD Electrical SR 2010-11**	Mtr							
	For Cutting Road Surface		1	450.00			**450.00**	60.00	**27000.00**
15	Supplying and fixing of Class A (meaium duty) GI pipe of wall thickness not less than 3.25mm on pole/wall/drain crossing with necessary clamping arrangements for UG cable of 1.1 KV class **P. No. 70/ I No.9-A KPWD Electrical SR 2010-11**	Mtr							
	40mm dia GI pipe		1	5.50			**5.50**	240.00	**1320.00**
16	Supplying and fixing L.T. cast Iron pot head suitable for 1.1 KV class UG cable filled with necessary bituumen/insulating compound complete with terminals, clamps, bolts, nuts and washers etc., **P. No. 70/ I No. 10-b KPWD Electrical SR 2010-11**	No.							
	16Sqmm		1				**1.00**	260.00	**260.00**
17	Supplying, fixing, wiring, earth electrode for grounding conduits, I.C cutouts and other equipments on the meter board using 40 mm dia 2.90 mm thick GI pipe 2.5 m long buried in a pit. The pit should be filled with equal propotion of solt and charocoal 150 mm alround the pipe to complete depth. The connection from the pipe to the conduit etc., is to be established through GI wire of size, as per ISI specification 7.3.3 IS 732 using 12 mm dia bolts, nuts, washers and check nuts, etc., the pipe shall have 16 throught holes of 122 mm dia, (PWD Electrical SR-1999-2000, **(P No.68, I No. 1) KPWD Electrical SR 2010-11**	No							
			1				**1**	1950.00	**1950.00**
18	Supplying and fixing of Porcelain fuse channel with cut out on existing wooden / panel using necessary nuts, bolts and washer etc., complete.... **P No. 32/I No 3d KPWD Electrical SR 2010-11**	No.							
	100 Amps		1x30				**30**	415.00	**12450.00**

Sl No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
19	KSRB 13-7.1-4: Providing and fixing in position 50mm nominal bore gun metal non-return valve horizontal type of approved make including cost of all materials, labour and HOM of equipments with all leads complete as per specifications NO KBS 13.2.16 / 13.13 **Page No. 82Item No. 13.55 / PWD SR 2010-11**	Nos							
	For New Drilled Borewell		1				**1**	1114.06	**1114.00**
	For Existing Borewell Repair		4				**4**	1114.06	**4456.00**
	Basic Rate	1051.00							
	Area Weightage @ 6%	63.06							
	Total	**1114.06**							
20	Providing NP/CP waste unions conforming to ISI specifications and fixing them in position as per directions including cost of materials, fixtures and conveyance to work spot etc., complete. P. No. 84 / I. No. 13.81.3 **PWD SR 2010-11**	No							
	50mm dia		1				**1**	201.40	**201.00**
	Basic Rate	190.00							
	Area Weightage @ 6%	11.40							
	Total	**201.40**							
21	Supplying TPST with rewirable portelain channels in SM enclosure **PRED SR 2010-11 P.32 item No. 1b Group A**	**No.**							
			1				**1**	3050.00	**3050.00**
22	Supplying and fixing 50mm dia GI X nipple with ISI mark with all lead and lift loading unloading and labour charges etc coomplete	No							
			1	6.00			**6**	80.00	**480.00**
23	Supplying shunt capaitors conforming to IS 2834, 3phase 400/440 volts grade for power factor improvement of rotating machinery, Capacitor in KVAR rating Nos. 2KVAR capacity with all lead and lift =, loading, unloading and labour charges etc complete as per specifications	No							
			1				**1**	350.00	**350.00**
24	Supplying and fixing miniature circuit breakers/solaters on existing MCB distribution boards using necessary fixing materiasl wiring complete as requireds 5 to 30 amps triple pole with all lead and lift, loading, unloading and labour charges etc complete as per specifications	No							
	60 AMPS		30				**30**	1000.00	**30000.00**
25	Fabrication supplying and mounting MS box of 16 SWG suitable for floor /wall mounting, fully weather proof with provision for better heat dissipation, provided with hinged front cover, equipped with tamper proof locking arrangements, with suitable size clamps with necessary cable entry pipe with gland and box should be finished 2 coats of red oxide primer paint and finally finished with approved colour enamelled metal paint etc., complete box of 21600 sqcm @ Rs.0.33 **P.No. 41, I. No. 38B KPWD Electrical SR 2010-11**	Sq.Cm							
	16SWG		1x2	220.00	60.00		13200.00		
			1	450.00	25.00		11250.00		
							24450.00	0.33	**8069.00**

Sl No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
26	Supplying and delivery at site brand new star / Essen/ Lotus/Sun-shines/Adarsh/ GK Controls best indigenous make combined energy meter - cum- control **panel board** unit of size 600x450 x200 mm minimum mechanically strong vermin and water proof. The unit shall have two detachable doors suitable for operation on 3 ph, 50Hz, 380/440 volts, A.C supply with spring loaded latch, locking device with a key ribs should be provided inside the door, canopy apron and louvers ventilators shall be provided. the combined energy meter cum- control panel board unit suitable for operation. The panel board shall be fabricated on single unit in the above components for suitable pumpset. **PRED Bangalore Circle SE Approved Date 30.07.2010 15HP to 30 HP Star Delta Starter**	No.							
			1				**1**	10000.00	**10000.00**
27	KSRB 13.6.3-6 : Providing and fixing in position brass gate valve with C.I wheel of approved quality (screwed end) **50mm** nominal bore including cost of all materials, labour and HOM of equipments with all leads complete as per specifications. Specification No. KBS 13.2.6/13.3 **(P.81/I.13.37 PWD SR - 2010-11)**	Each							
			18				**18**	1582.58	**28486.00**
	Basic Rate	1493.00							
	Area Weightage @ 6%	89.58							
	Total	**1582.58**							
31	BESCOM Deposit for Engersation	L/S	1	15000.00					**15000.00**
32	Miscellaneous and Unforeseen Charges	L/S							**904.00**
									800000.00

(Rupees Eight Lakhs Only)

CERTIFICATE :

1 The work spot has been inspected and the work is found necessary.
2 This estimate is prepared as per S.R.of Rural Engineering Department
4 The provisions were made in this estimate are necessary and adequate.
5 This works come under B.B.M.P. limits.

Assistant Engineer

Assistant Executive Engineer
Bruhat Bangalore Mahanagara Palike
Byatarayanapura Sub Division
Bangalore-24

Executive Engineer
Bruhat Bangalore Mahanagara Palike
Byatarayanapura Division
Bangalore - 92

ADMINISTRATIVELY SANCTIONED FOR Rs By 8.00 lakh
Rupees Eight lakhs Only
Under 22.75(1)

Registered as EE ( ) No 3.....9.....
Subject to conditions contained in enclosed memo EE ( ) No /9/....
Dt Estimate A/Sanctioned
JC(4) A/4 1129/13-14
dated 25/5/2013 Rs 8.00 lakh

Technical Sanction is accorded for Rs 8.00 lakhs
Vide CE RNo: 105 Dt: 27/5/13
TA
CE 27/5/13

Joint Commissioner
(Yelahanka Zone)
BBMP, Bengaluru-92

Drilling & Bore Well and Providing Pump And Motor At Thanisandra Ward No. 06. Byatarayanapura Sub Division.

152 - BYATARAYANAPURA AC
WARD NO_6- THANISANDRA

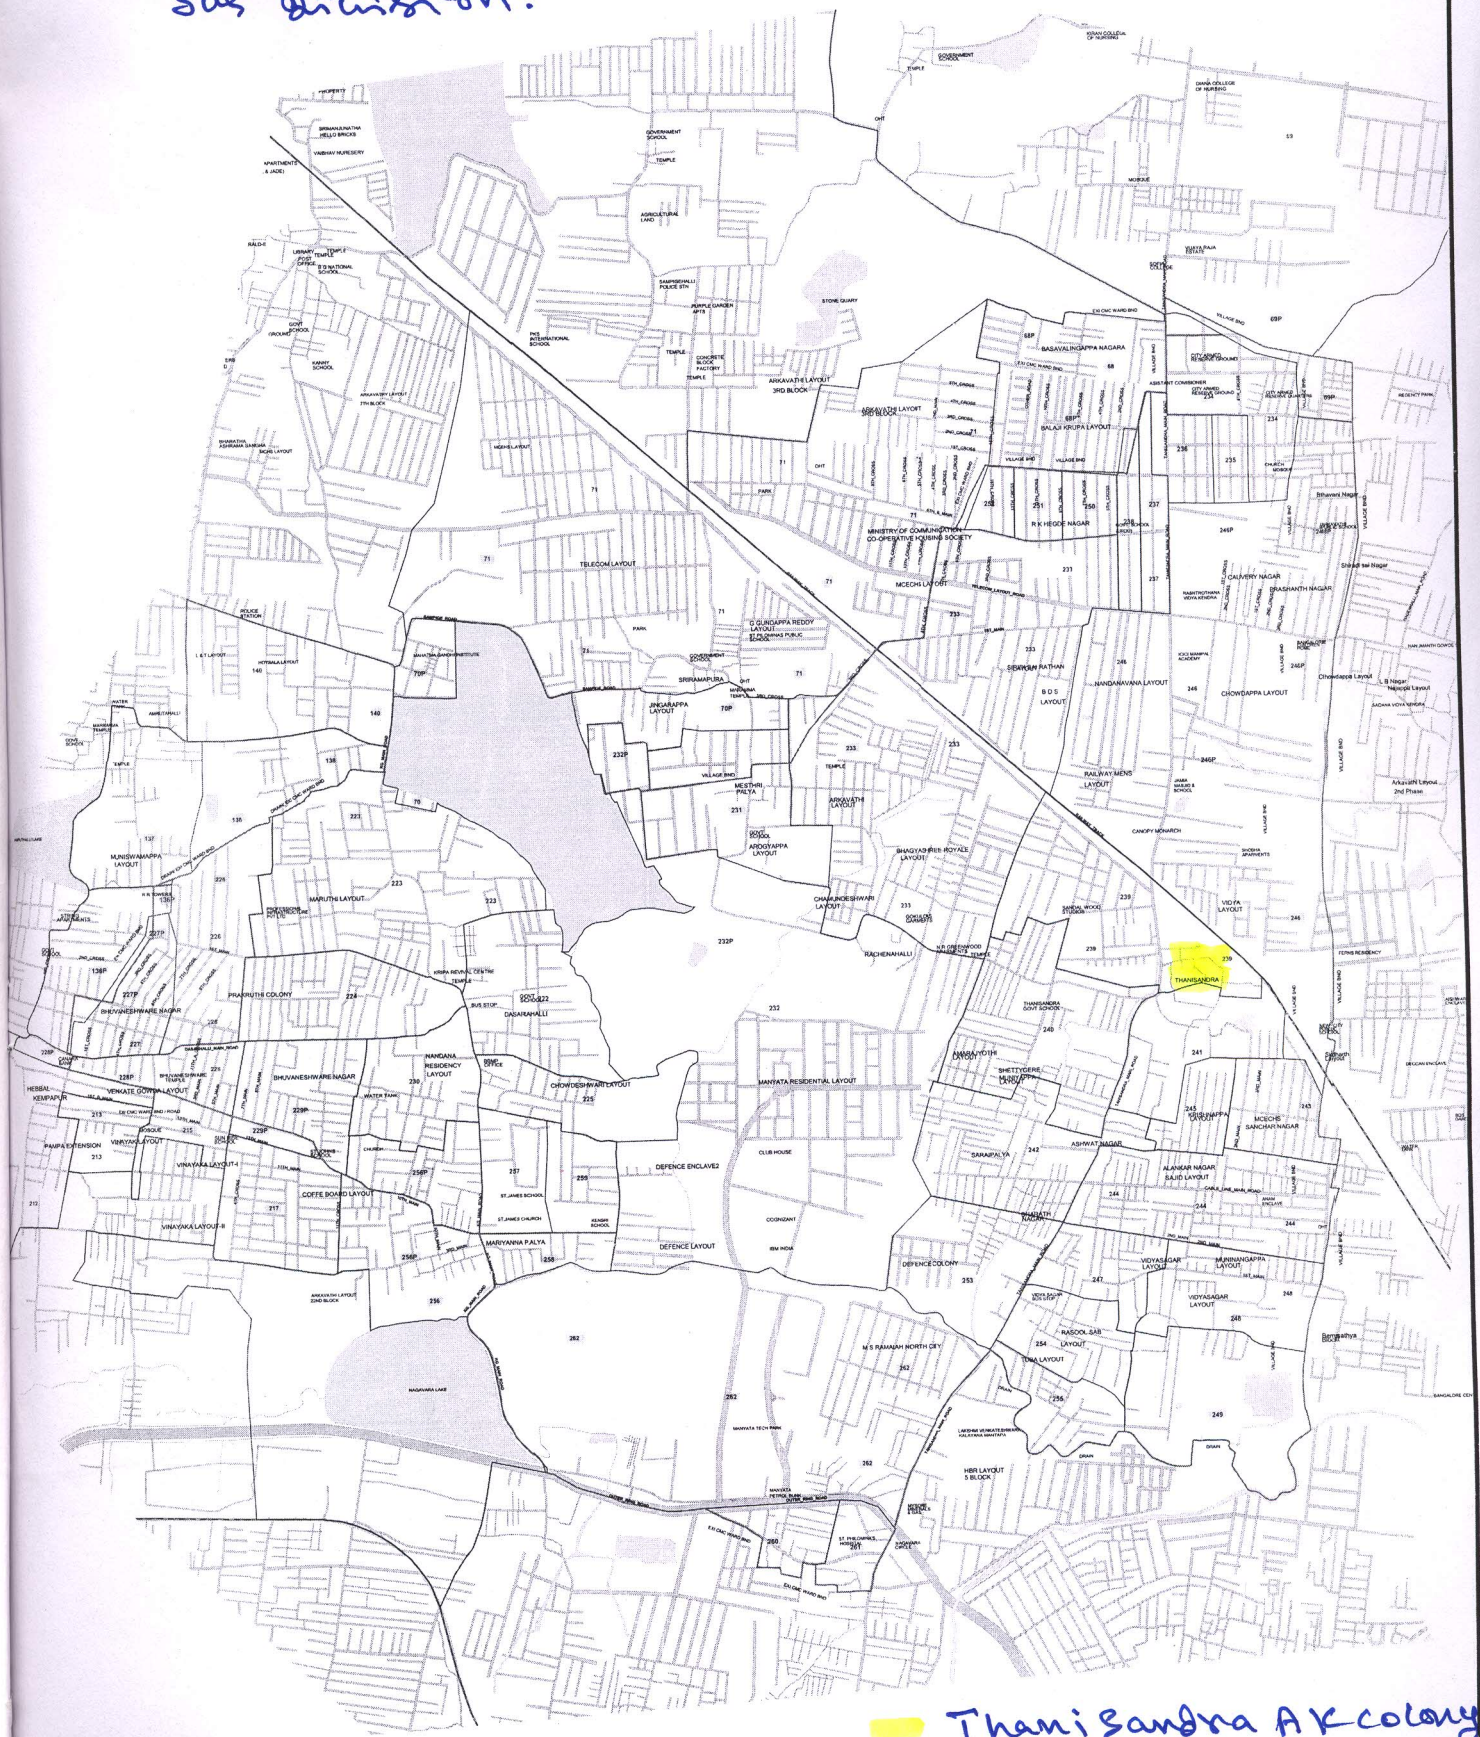

Thanisandra AK colony

ಸಹಾಯಕ ಕಾರ್ಯನಿರ್ವಾಹಕ ಅಭಿಯಂತರರು
ಬಿ.ಬಿ.ಎಂ.ಪಿ. ಬ್ಯಾಟರಾಯನಪುರ ಉಪ ವಿಭಾಗ

Assistant Executive Engineer
Byatarayanapura Sub Division
B.B.M.P. Bangalore